


# M-6017-A504V OSS hookup

OSS

1R3Z-7H103-AA – For vehicles with metal toothed wheel in transmission

E9LZ-9E731-A – For vehicles with plastic gear in transmission

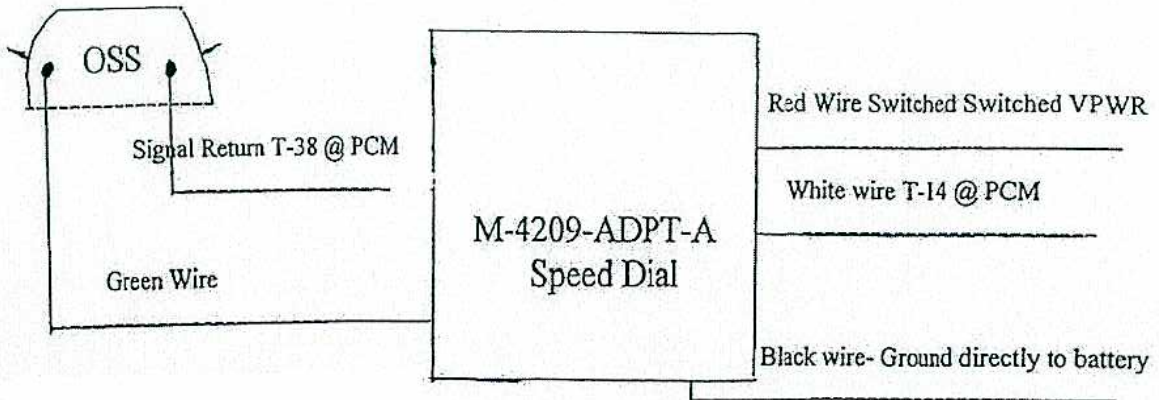

Set the dip switches to 111

Use 18 gauge wire. Make sure to solder all connections and use shrink wrap.

By adding the Ford Racing Speed Dial the transmission output speed signal is transformed into a format the ECM recognizes. The ECM uses this signal to determine if the vehicle is in motion and uses that data to determine the proper idle characteristics. This will result in more consistent idle especially during extended coasting to a stop.

Adding the Speed Dial requires minimal wiring. If you have any questions regarding how to add the necessary pin-outs to the M-6017-A504V harness please contact the Ford Racing technical support line or a professional installer

